

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

1/6

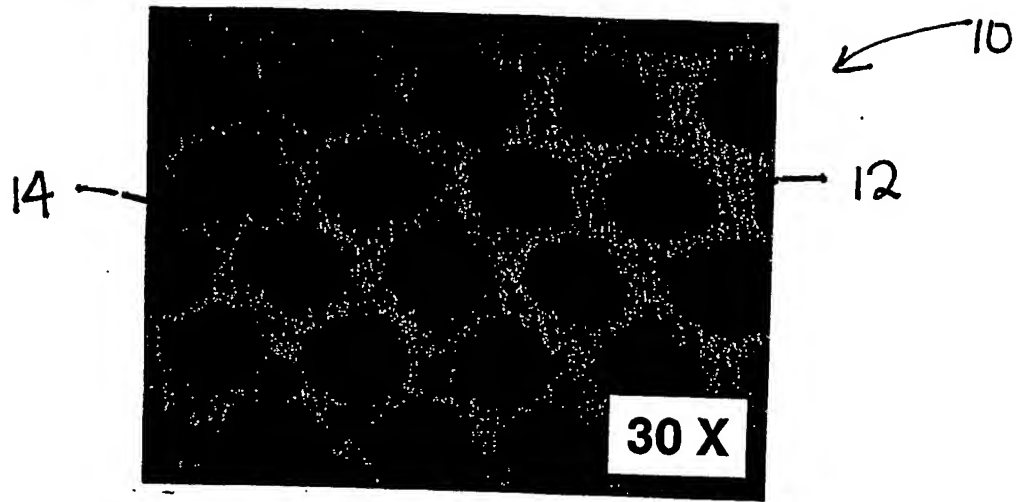


FIG. 1

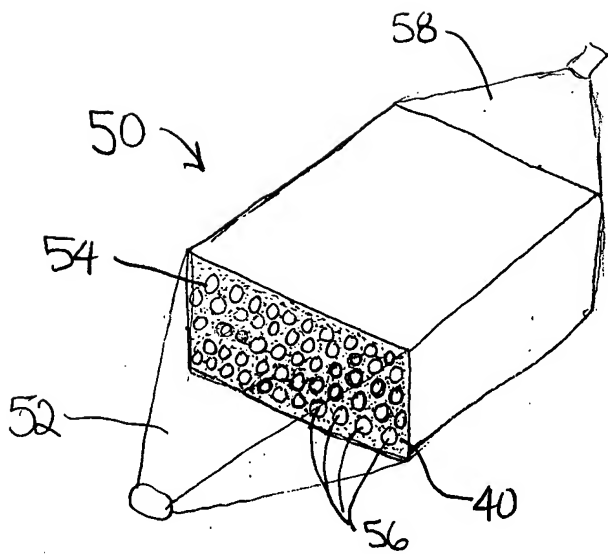


FIG. 2

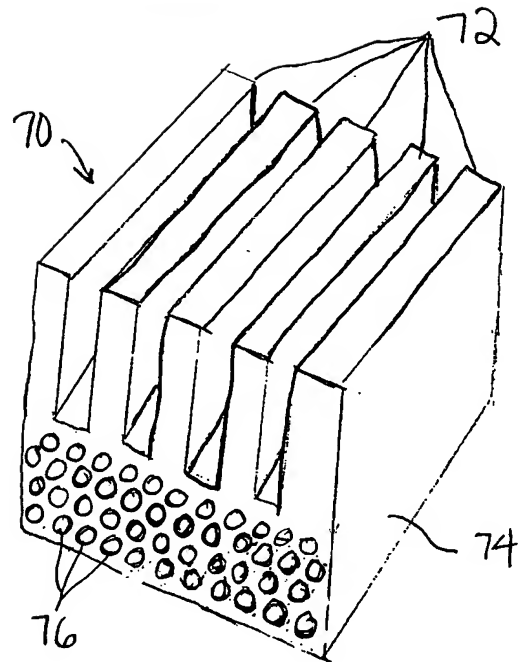


FIG. 3

2/6

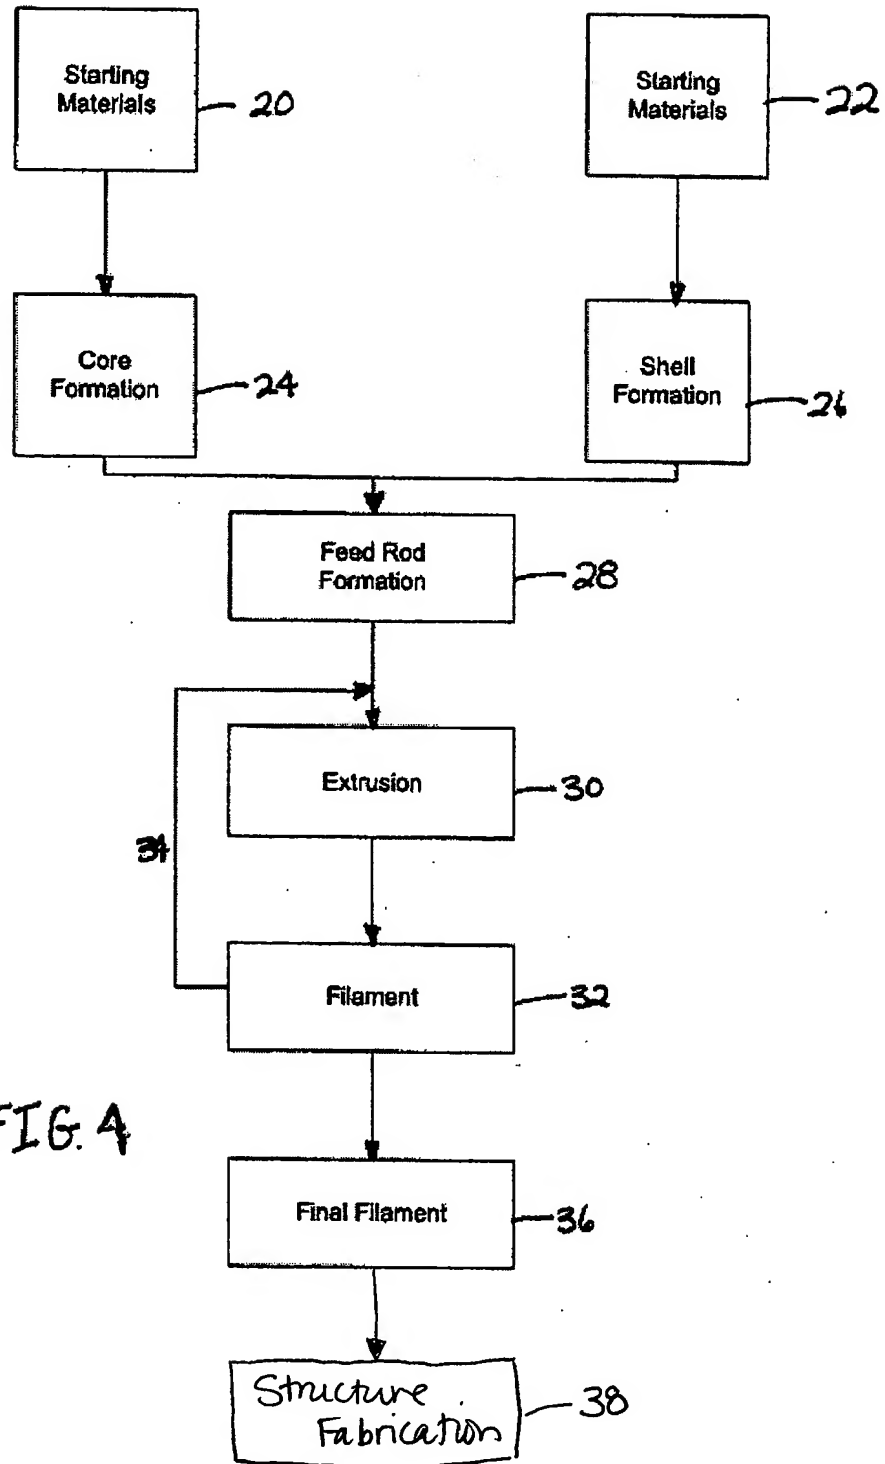


FIG. 4

3/6

FIG. 5

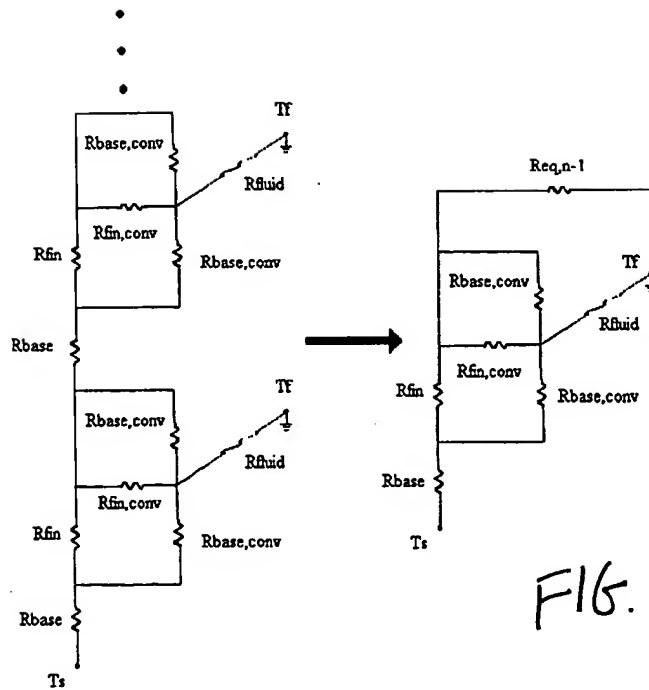

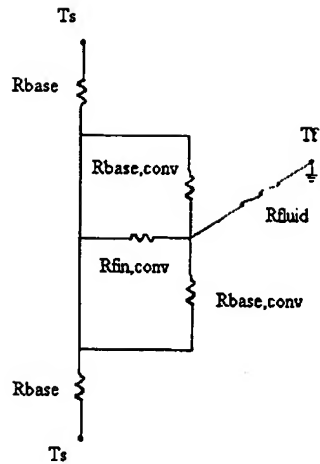


FIG. 6

4/6

FIG. 7

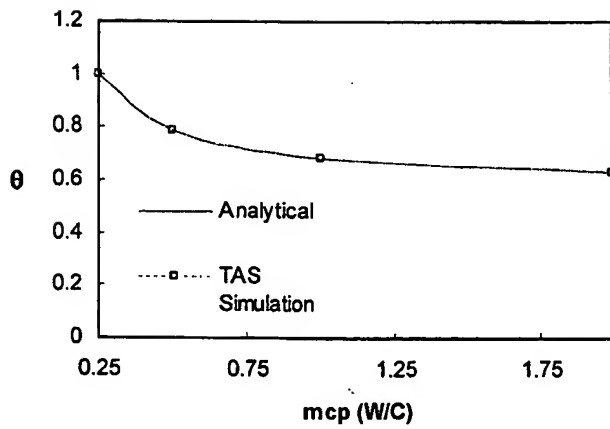
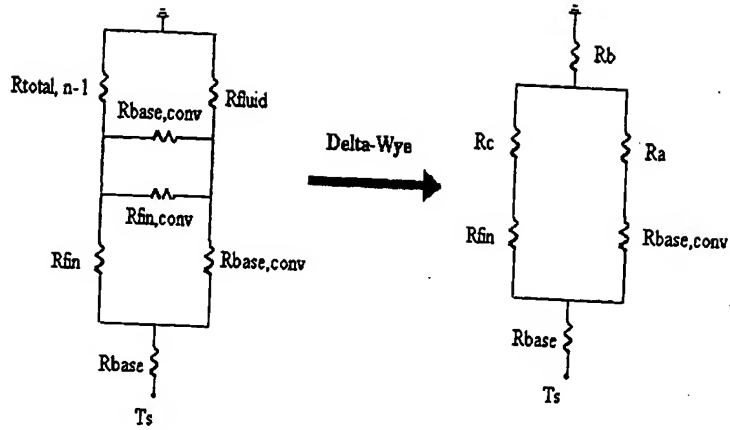


FIG. 8


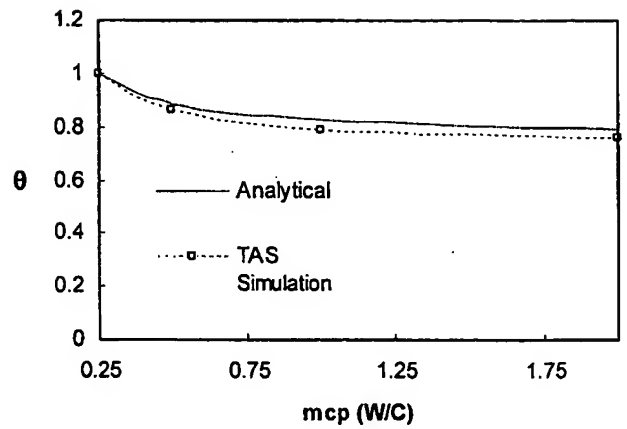


FIG. 9

5/6

FIG. 10

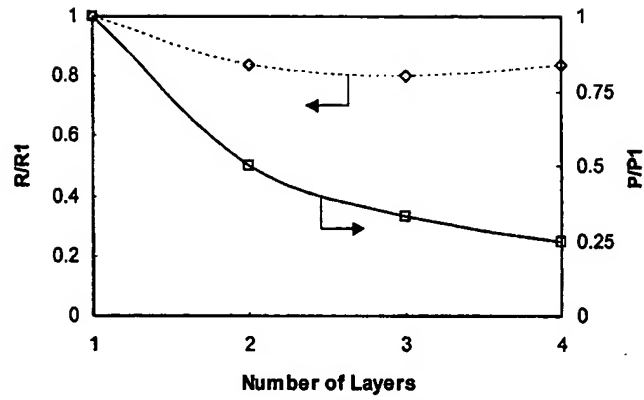

Optimization of number of layers with fixed overall flow rate with single-sided heating  
 $R_1$  is the overall thermal resistance for one layer case  
 $P_1$  is the overall pumping power for one layer case

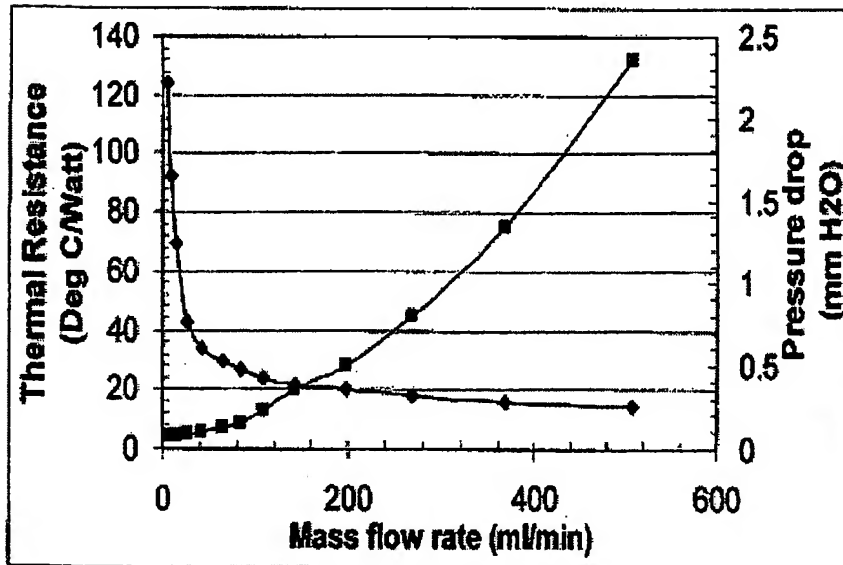


FIG. 11

6/6

